6655 Blvd. Pierre Bertrand, Office 240
Québec City, QC, G2K 1M1, Canada
Phone: +1-888-548-4344
www.osf-global.com

Virtual Dressing Room

Technical User Manual

© 2015 OSF Global Services. All Rights Reserved.

6655 Blvd. Pierre Bertrand, Office 240
Québec City, QC, G2K 1M1, Canada
Phone: +1-888-548-4344
www.osf-global.com

Content

Plugin settings 3
MainContainerClass 3
AccessoriesContainerClass 4
AccessoriesContainerAllowed 4
ContainerGeneralClass 5
ContainerEmptyClass 5
ContainerNotEmptyClass. 5
ManipulatorAdditionalClasses. 5
XButtonAdditionalClasses 6
ContainerHeadingObject. 6
DraggableObject 7
ResetButtonObject 8
ItemTopValue 9
ShowEffects. 10
Initializing the plugin 11
Plugin Initialization with no custom options 11
Plugin Initialization with some custom options 11
Plugin Initialization with all custom options 11
Reinitializing the plugin after AJAX calls 12

© 2015 OSF Global Services. All Rights Reserved.

6655 Blvd. Pierre Bertrand, Office 240
Québec City, QC, G2K 1M1, Canada
Phone: +1-888-548-4344
www.osf-global.com

Plugin settings

The image below captures the plugin options and its default values.

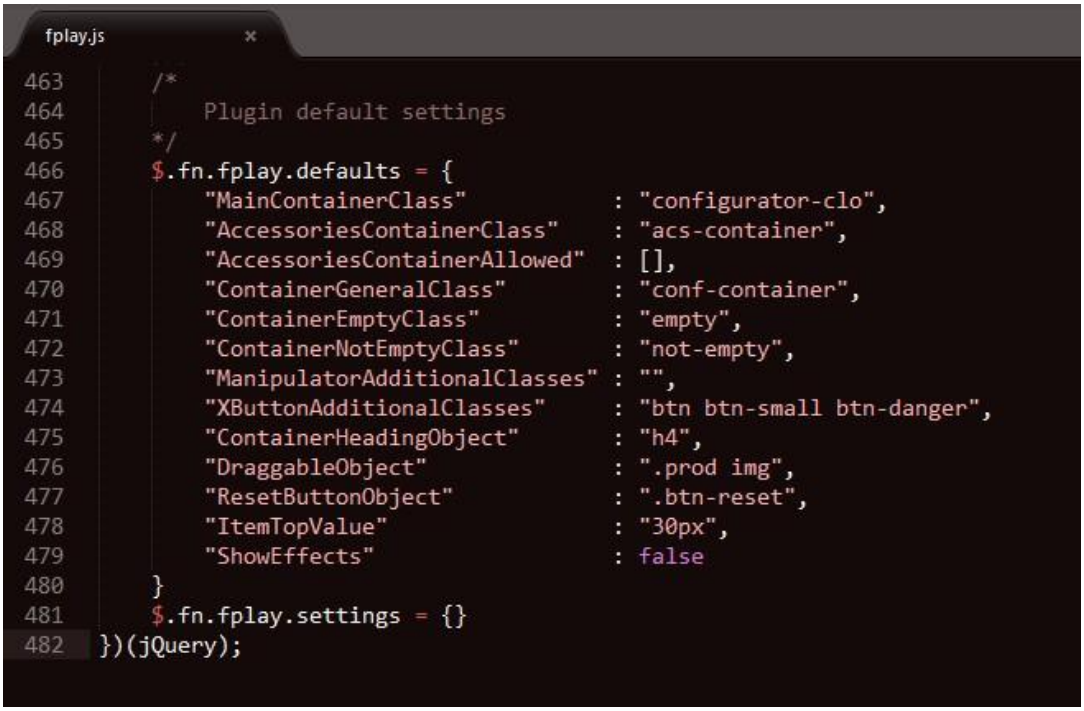

1. **MainContainerClass** – Defines the main container class. This option should **NOT** contain multiple classes. **Default**: `"configurator-clo"` **Example of custom implementation**:

```
jQuery.fplay({
    "MainContainerClass" : "yourMainContainerClass"
            });
```

This will not work: `"MainContainerClass": "class1 class2 class3"`

[The custom implementation and the customization that will not work also apply for points 2, 4, 5, 6]

© 2015 OSF Global Services. All Rights Reserved.

6655 Blvd. Pierre Bertrand, Office 240
Québec City, QC, G2K 1M1, Canada
Phone: +1-888-548-4344
www.osf-global.com

2. **AccessoriesContainerClass** – Defines the accessories container class. This option should **NOT** contain multiple classes.
   Default: "acs-container"
   Example of custom implementation: Please see point 1.

3. **AccessoriesContainerAllowed** – Defines an ARRAY of categories whose products are allowed to be dropped into the accessories container.
   Default: []
   -The default in this case means an empty array, hence the option is disabled.
   -When the option is disabled, all products may be dropped into any of the two containers.
   -When the option is enabled, which is achieved by defining one or more categories in the array (please see "Example of custom implementation"), normal products can't be dropped into the accessories container, while accessories can't be dropped into the main container.
   -The plugin will automatically drop them in the right container.
   Example of custom implementation:

```
  jQuery.fplay({
        "AccessoriesContainerAllowed" : ["womens-
jewelry", "mens-accessories"]
               });
```

   These will not work:

- "AccessoriesContainerAllowed" : "womens-jewelry"
- "AccessoriesContainerAllowed" : "womens-jewelry, mens-accessories"
- "AccessoriesContainerAllowed" : "womens-jewelry", "mens-accessories"

© 2015 OSF Global Services. All Rights Reserved.

4. **ContainerGeneralClass** – Defines the containers' general (common) CSS class. This option should **NOT** contain multiple classes.
   Default: "conf-container"
   Example of custom implementation: Please see point 1.

5. **ContainerEmptyClass** – Defines the container empty class, which is present on an empty container (contains no products). This option should **NOT** contain multiple classes.
   Default: `"empty"`
   Example of custom implementation: Please see point 1.

6. **ContainerNotEmptyClass** – Defines the container not-empty class, which is present on a container which has at least one item added. This option should **NOT** contain multiple classes.
   Default: `"not-empty"`
   Example of custom implementation: Please see point 1.

7. **ManipulatorAdditionalClasses** – Defines additional classes for the product rotation helper (manipulator) – bar element with a yellow bullet at the top.
   Default: `""` (empty)
   Exemple of custom implementation:

a.
```
jQuery.fplay({
      "ManipulatorAdditionalClasses" : "another-manipulator-class"
   });
```

b.
```
jQuery.fplay({
      "ManipulatorAdditionalClasses" : "another-manipulator-class, second-manipulator-class, evenAnotherClass"
```

© 2015 OSF Global Services. All Rights Reserved.

```
        });
```

This will not work: `"ManipulatorAdditionalClasses" : " another-manipulator-class", "second-manipulator-class","evenAnotherClass"`

[The custom implementation and the customization that will not work also apply for point 8.]

8. **XButtonAdditionalClasses** – Defines additional classes for the product removal red button.

   Default: `"btn btn-small btn-danger"`

   -These classes are set by default in order to accommodate the element with the Twitter Bootstrap CSS framework.

   -In case this is not desired, just replace the defaults with any other classes which may be needed for proper styling.

   Example of custom implementations:

```
jQuery.fplay({
        "XButtonAdditionalClasses" : "my-button-class my-red-button"
            });
```

   This also works (extending the default classes):

```
    jQuery.fplay({
        "XButtonAdditionalClasses" : "btn btn-small btn-danger my-button-class my-red-button"
                });
```

9. **ContainerHeadingObject** – Defines the heading element for both containers.

   -Headings are shown only when a container is empty.

   When at least one product is added, the heading will disappear and reappear only after the container gets its "empty" state back (by either manually removing the products or by clicking the Reset button).

   Default: `"h4"`

© 2015 OSF Global Services. All Rights Reserved.

6655 Blvd. Pierre Bertrand, Office 240
Québec City, QC, G2K 1M1, Canada
Phone: +1-888-548-4344
www.osf-global.com

Example of custom implementation:

```
jQuery.fplay({
    "ContainerHeadingObject" : "h5"
});
```

This will not work: Setting more than one element as ContainerHeadingObject, e.g. "ContainerHeadingObject": "h1, h2, h3" or any other combination of that kind.

[NOTE! If changing the container heading object is desired, the element itself has to be changed as well in the ISML template.

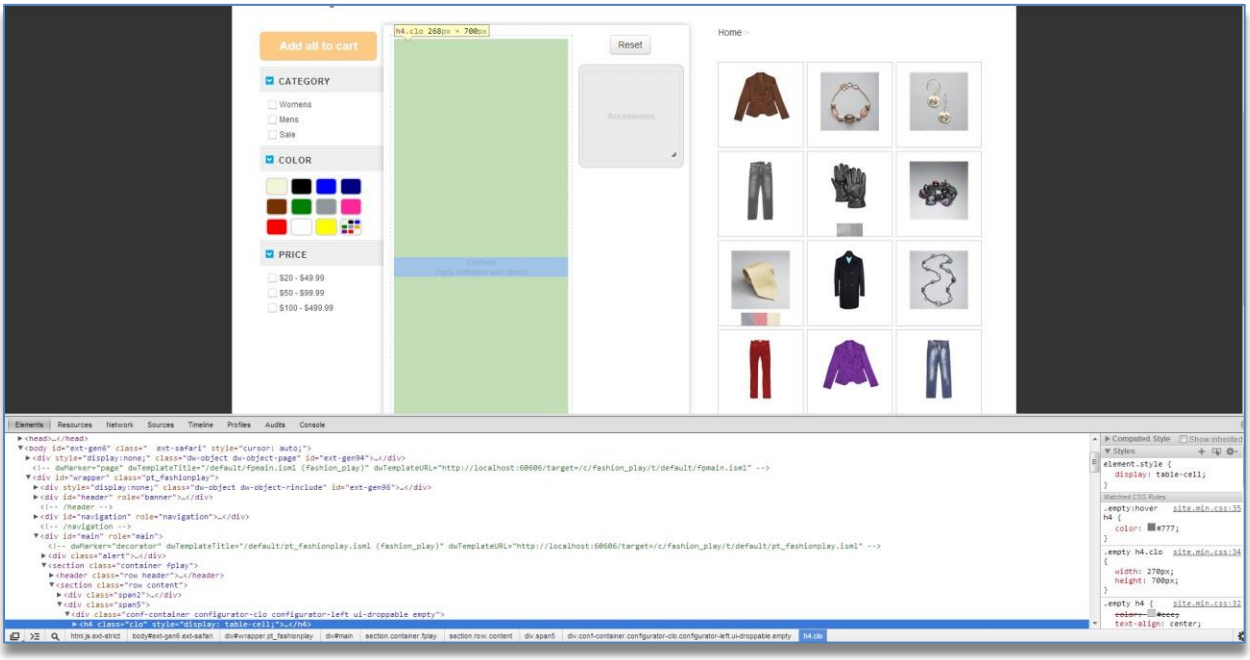

10. **DraggableObject** – Defines the drag-able object – the product element which can be dragged from the grid into any of the two containers.
    Default: ".prod img"

    Example of custom implementation:

© 2015 OSF Global Services. All Rights Reserved.

6655 Blvd. Pierre Bertrand, Office 240
Québec City, QC, G2K 1M1, Canada
Phone: +1-888-548-4344
www.osf-global.com

```
  jQuery.fplay({
        "DraggableObject" :
".product-grid img"
                        });
```

This will not work: Setting more than one element as the drag-able object e.g. "DraggableObject" : ".product-grid img", "product-grid-2 img" or any other implementation as such.

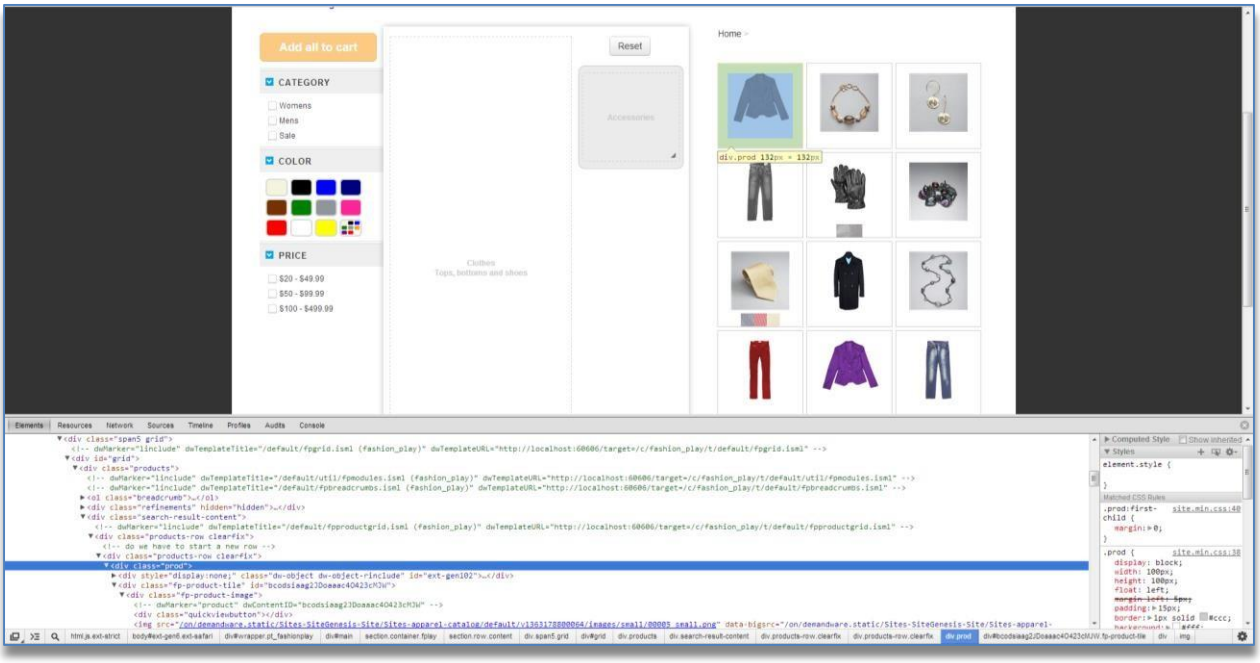

11. **ResetButtonObject** – Defines the button object (element) which will be used for the reset actions.
    Default: ".btn-reset"

    Example of implementation:

© 2015 OSF Global Services. All Rights Reserved.

```
    jQuery.fplay({
        "ResetButtonObject" :
".some-other-button"
    });
```

This will not work: Setting more than one element as the reset button object.

[NOTE ! If the default is changed, please make sure the defined element exists into the template.**]**

12. **ItemTopValue** – Defines the top value (relative to the container) for a dropped product. This is used to accommodate the rotation helper (please see screen below).

    Default: "30px"

    Example of custom implementation:

```
    jQuery.fplay({
        "ItemTopValue" :
"2em"
    });
```

This will not work: Multiple values, bogus values and others alike.

© 2015 OSF Global Services. All Rights Reserved.

6655 Blvd. Pierre Bertrand, Office 240
Québec City, QC, G2K 1M1, Canada
Phone: +1-888-548-4344
www.osf-global.com

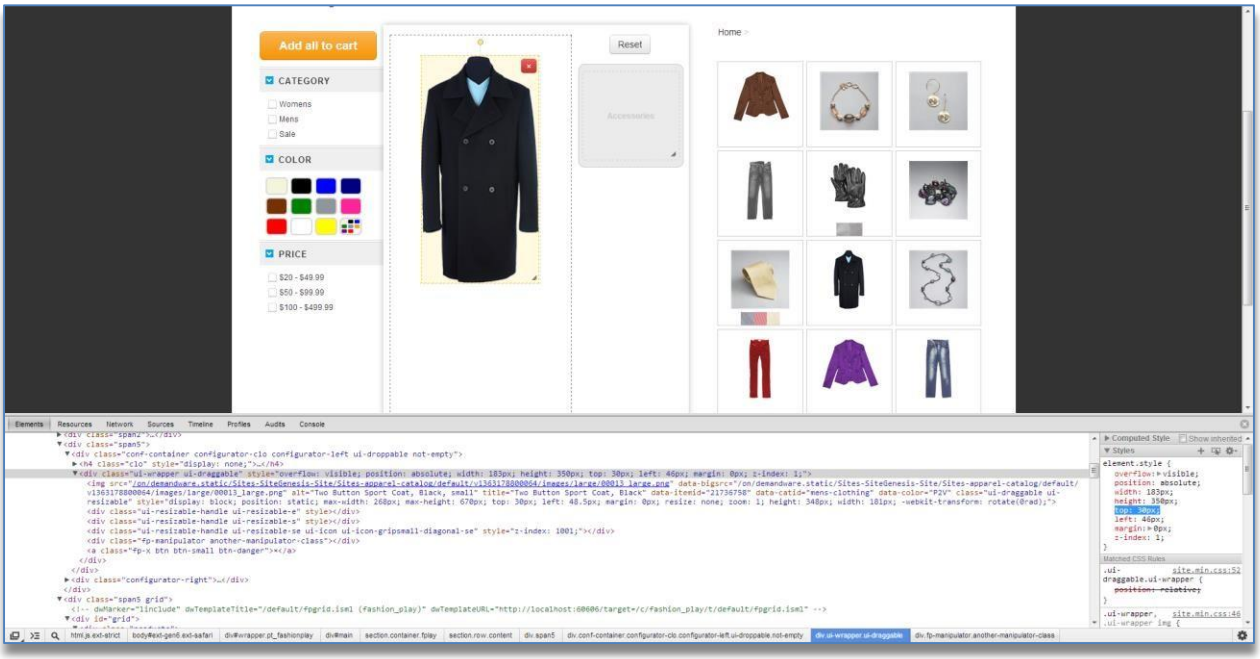

13. **ShowEffects** – Defines whether an item removal explode effect should be shown.

    Default: `false`

    Example of custom implementation:

```
jQuery.fplay({
    "ShowEffects" : true
});
```

    This will not work: Any other value but true or false.

© 2015 OSF Global Services. All Rights Reserved.

6655 Blvd. Pierre Bertrand, Office 240
Québec City, QC, G2K 1M1, Canada
Phone: +1-888-548-4344
www.osf-global.com

Initializing the plugin

Depending on the needs of the user, the plugin may be initialized with no customized options at all (this will load the default options), with custom values for SOME options, or by defining custom values for ALL options.

Plugin Initialization with no custom options:

```
jQuery.fplay();
```

Plugin Initialization with some custom options:

```
jQuery.fplay({
        "AccessoriesContainerAllowed" : ["womens-
jewelry", "mens-accessories"],
        "ManipulatorAdditionalClasses" : "another-
manipulator-class",
        "ShowEffects" : true
                    });
```

Plugin Initialization with all custom options:

```
jQuery.fplay({
        "MainContainerClass"           : "main-container",
        "AccessoriesContainerClass"    : "second-container",
        "AccessoriesContainerAllowed"  : ["category1",
"category2", "category3"],
        "ContainerGeneralClass"        : "common-container-
class",
        "ContainerEmptyClass"          : "no-products",
        "ContainerNotEmptyClass"       : "with-products",
        "ManipulatorAdditionalClasses" : "manipulator-
additional-class",
```

© 2015 OSF Global Services. All Rights Reserved.

```
        "XButtonAdditionalClasses"      : "my-fancy-button my-
red-button",
        "ContainerHeadingObject"        : "h5",
        "DraggableObject"               : ".product-grid img",
        "ResetButtonObject"             : ".reset-containers-
button",
        "ItemTopValue"                  : "50px",
        "ShowEffects"                   : true
    });
```

Reinitializing the plugin after AJAX calls

The plugin has to be reinitialized after an AJAX call (e.g. changing any refinements, navigating from the breadcrumbs or pagination and so on).

This may be done exactly as in the examples above, in the callback:

```
app.ajax.load({
      url: url,
      target: $cache.gridContainer,
      callback: function(){
          jQuery.fplay({
              "AccessoriesContainerAllowed" : ["womens-
jewelry", "mens-accessories"]
          });
            app.progress.hide();
      }
});
```

NOTE! Please note that app.fplay.js also contains four AJAX calls, so the plugin initialization has to be copied in those AJAX calls' callback methods as well.

© 2015 OSF Global Services. All Rights Reserved.

6655 Blvd. Pierre Bertrand, Office 240
Québec City, QC, G2K 1M1, Canada
Phone: +1-888-548-4344
www.osf-global.com

Thank you for your interest in the Virtual Dressing Room. Should you have any questions, please contact us at integration-support@osf-global.com .

© 2015 OSF Global Services. All Rights Reserved.